



PRO66

Designed for operator convenience and safety, these articulating jib booms are ideal for up-out-over-down platroft placement in a wide variety of construction or maintenance applications.


STANDARD FEATURES

- 6' articulating jib boom
- Fully proportional ramp-on controls
- Rheostat control at ground for boom functions and platform level
- Foam filled tires
- 180° hydraulic platform rotation
- 12 volt battery operated emergency power
- Manual bleed down valve
- Driveable at full height
- 5° tilt alarm
- 125 volt GFCI AC outlet at platform
- Aluminium alloy upper booms
- Hour meter and ammeter
- Tie down lug
- 60 month warranty



SPECIFICATIONS

Working Height	72'	21.9 m
Platform		
Height	66'	20.1 m
Capacity	500 lbs.	227 kg
Size	60" x 30"	152 x 76 cm
Construction	Steel	
Boom Construction		
Base Boom	Steel	
Telescoping Booms and	High strength aluminum alloy	
Boom Extension	Double acting hydraulic cylinder and dual wire rope cables	
Boom Guides	Lubrication free, ultra high molecular weight polyethylene	
Pivot Pin Bearings	Lubrication free, composite material	
Horizontal Reach	56'	17.1 m
Elevation	+72°/-1° Telescoping	
Hose & Wiring Extension	housing attached to sides of booms	
Turntable Rotation	360° continuous	
Power Source	Gas (LP or Dual Fuel optional) or Diesel engine	
Fuel Capacity	40 US gal	151.4 L
Hydraulic System Capacity	35 US gal	132.5 L
Maximum Drive Speeds		
Boom Stowed	3 mph	4.83 kph
Boom Raised	1 mph	1.61 kph
Gradeability	25%	
Turning Radius (Inside)	15'5"	4.7 m
Stowed Height	8'9"	2.7 m
Width	8"12"	2.5 m
Stowed Length	33'	10.1 m
Wheelbase	10'	3.0 m
Tires	15 x 19.5	
Type	Foam filled, 12 ply rating	
Weight (approx.)	25,000 lbs	11,340 kg

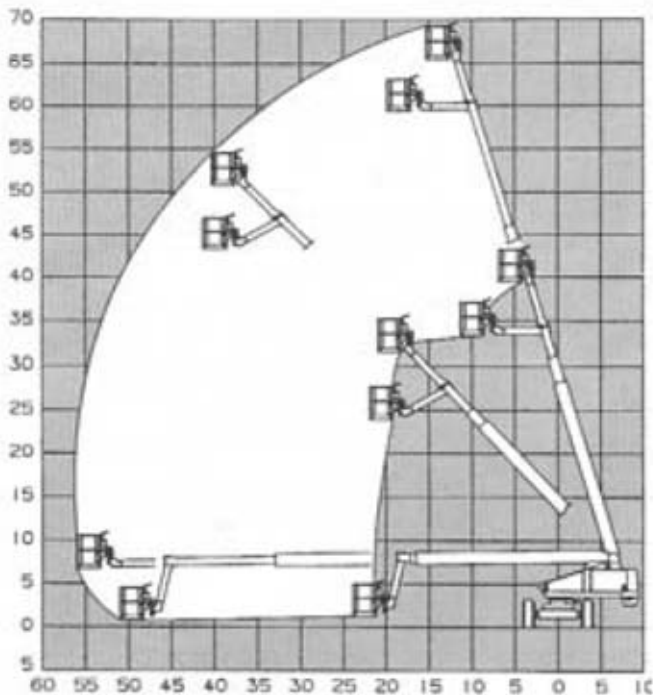

Godwin's Garage - Ranger Limited
 Triq tal-Balal,
 Tax-Xwieki,
 Għarghur, GHR 9013
 MALTA – EUROPE

Tel: (+356) 21424771/2/3

Mob: (+356) 9949 2584, (+356) 7947 8990

Email: info@godwinsgarage.com

Web: http://www.godwinsgarage.com